

DS-D5019S0-1P0 18.5 inch Monitor



- 178° ultra-wide view screen.
- 3D noise reduction.
- Low blue light design for eye care.
- Dual interface of HDMI and VGA.
- Support VESA wall mount.

▪ Specification


| Display | |
|--------------------------------|--|
| Screen Size | 18.5 inch |
| Active Display Area | 409.8 (H) mm × 230.4 (V) mm |
| Resolution | 1366 × 768 |
| Backlight | E-LED |
| Pixel Pitch | 0.300 mm (H) × 0.300 mm (V) |
| Brightness | 200 cd/m ² |
| Viewing Angle | 178° (H)/178° (V) |
| Color Depth | 8 bit, 16.7 M |
| Contrast Ratio | 1000:1 |
| Response Time | 14 ms |
| Refresh Rate | Max. 75 Hz, Typ. 60 Hz |
| Haze | Haze 25%, 3H |
| Reliability | 7 × 12 H |
| Color Gamut | 72% NTSC |
| Interface | |
| Video & Audio Input | HDMI 1.4 × 1, VGA × 1 |
| Power | |
| Power Supply | DC 12 V, 2.0 A |
| Power Consumption | ≤ 24 W |
| Standby Consumption | ≤ 0.5 W |
| Working Environment | |
| Working Temperature | 0 °C to 40 °C (32 °F to 104 °F) |
| Working Humidity | 20% RH to 90% RH (Non-Condensing) |
| Storage Temperature | -20 °C to 60 °C (-4 °F to 140 °F) |
| Storage Humidity | 10% RH to 90% RH (Non-Condensing) |
| General | |
| Casing Material | Plastic |
| VESA | 75 mm × 75mm (4 - M4 × 6 mm) |
| Bezel Width | 17.84mm (left/right), 18.39 mm (top), 26.39 mm (bottom) |
| Product Dimensions (W × H × D) | With base: 447.00 (W) mm × 351.04 (H) mm × 200.21 (D) mm (17.60" × 13.82" × 7.88") Without base: 447.00 (W) mm × 276.00 (H) mm × 46.00 (D) mm (17.60" × 10.87" × 1.81") |
| Package Dimensions (W × H × D) | 487 (W) mm × 363 (H) mm × 97 (D) mm |
| Net Weight | 1.9 ± 0.5 kg (4.19 ± 1.1 lb) |
| Gross Weight | 2.4 ± 0.5 kg (5.29 ± 1.1 lb) |
| Packing List | Monitor × 1, Base component × 1, Power adapter (12 V, 2.0 A) × 1, HDMI cable (1.5 m) × 1, User manual × 1, Multilingual manual × 1 |
| Remarks | The base is included by default. The product appearance and parameters in this specification may vary from your actual device. Please consult our local sales staff for further information |

▪ **Physical Interface**


| Interface | Interface | Interface | Interface |
|-----------|---|-----------|-----------------------------------|
| HDMI | HDMI 1.4 digital signal input interface | VGA | VGA analog signal input interface |
| DC | DC 12 V 2.0 A input interface | | |



HDMI



VGA




DC

▪ **Available Model**

DS-D5019S0-1P0

▪ **Dimension**

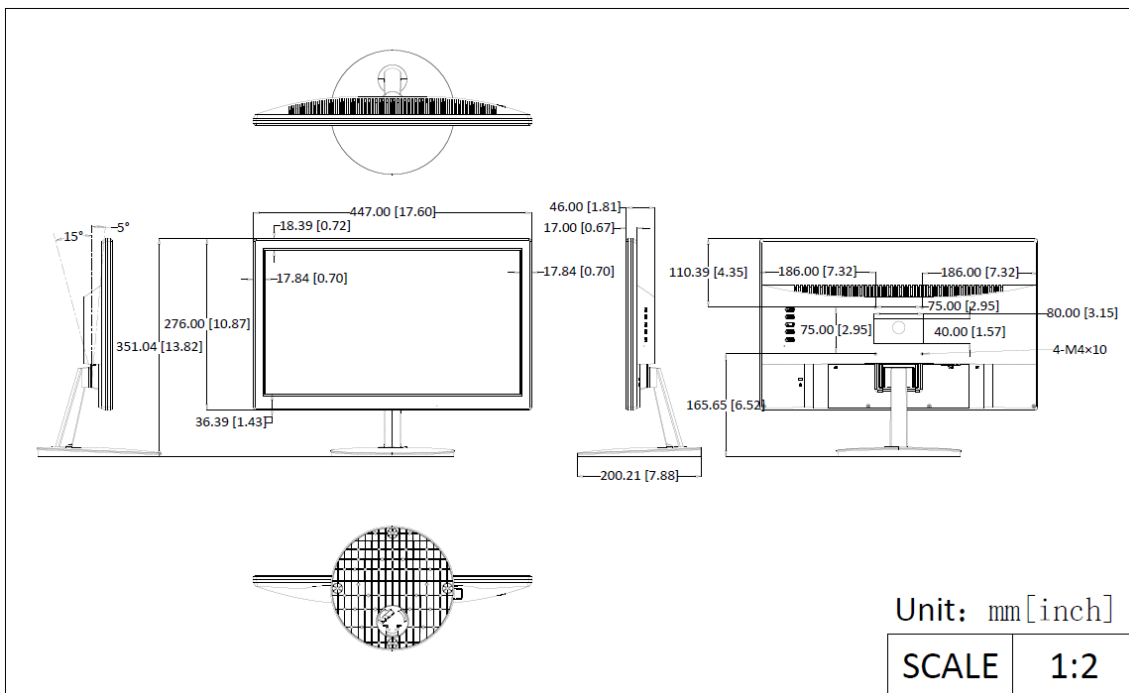

- **Accessory**
- **Optional**

DS-DM1940W
Wall-mounted Bracket

**Headquarters**

No.555 Qianmo Road, Binjiang District,
Hangzhou 310051, China
T +86-571-8807-5998
www.hikvision.com



Follow us on social media to get the latest product and solution information.



Hikvision



HikvisionHQ



HikvisionHQ



Hikvision_Global



Hikvision
Corporate Channel



hikvisionhq