

DS-KH7000EY-E2 Audio 2-wire HD Indoor Station



- No screen audio indoor station with touch button.
- Support custom buttons.
- Support floor calls.

▪ Specification


System parameters	
Operation system	Embedded FreeRTOS operation system
Processor	Embedded processor
Display parameters	
Operation method	9 touch button
Type	/
Video parameters	
Video compression standard	/
Lens	/
FOV	/
Wide dynamic range (WDR)	/
Resolution	/
Focal length	/
Audio parameters	
Audio input	1 Built-in omnidirectional microphone
Audio compression standard	G726
Audio output	1 Built-in loudspeaker
Audio compression bitrate	64 Kps
Audio quality	Noise suppression and echo cancellation
Volume adjustment	Adjustable
Capacity	
Linked indoor extensions capacity	3
Network parameters	
Wired network	10/100 Mbps self-adaptive through 2-wire interface
Wi-Fi	/
3G/4G	/
Zigbee	/
Device interfaces	
Alarm input	1
TAMPER	/
RS-485	/
USB	/
TF card	/
Alarm output	/
DIP switch	7 decimal DIP switch and 4 binary DIP switch
Power supply input	Powered by DS-KAD7060EY/DS-KA7061EY or 12V
Two-Wire IP interface	2, 1 for input 1 for output
General	
Button	9 touch button
Installation	Surface mounting
Indicator	/
Protective level	/
Working temperature	-10 °C to 50 °C (14 °F to 122 °F)

Working humidity	10% to 90% (no-condensing)
Dimension (W × H × D)	190.2 mm × 138.2 mm × 20 mm (7.5" × 5.4" × 0.8")
Battery	/
Power supply	Powered by DS-KAD7060EY/DS-KA7061EY or 12V DC
Application environment	Indoor
Power consumption	≤ 4W (stand by ≤ 1W)
Language	English, Bulgarian, Hungarian, Greek, German, Italian, Czech, Slovak, French, Polish, Dutch , Spanish, Romanian, Estonian, Croatian, Slovenian, Serbian, Ukrainian, Portuguese

▪ **Available Model**

DS-KH7000EY-E2

▪ **Dimension**

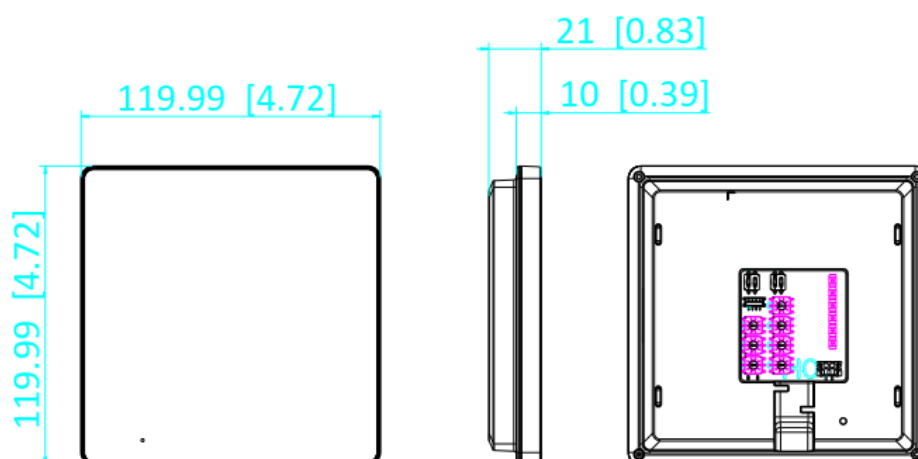

Unit:mm [inch]

SCALE 1:1

Headquarters

No.555 Qianmo Road, Binjiang District,
Hangzhou 310051, China
T +86-571-8807-5998
www.hikvision.com



Follow us on social media to get the latest product and solution information.

