

DS-3E0528HP-E 24 Port Gigabit Unmanaged PoE Switch



DS-3E0528HP-E switches are layer 2 Hi-PoE switches, providing PoE power supply technology and Gigabit network design on the basis of network access to ensure stable data upload. The switches support Hi-PoE, long range, port isolation, and PoE watchdog functions.

- 20 × gigabit PoE port, 4 × gigabit Hi-PoE port, 2 × gigabit RJ45 port, and 2 × gigabit fiber optical port.
- IEEE 802.3at/af/bt standard for Hi-PoE ports (Max. 90 W PoE output).
- IEEE 802.3at/af standard for PoE ports (Max. 30 W PoE output).
- IEEE 802.3, IEEE 802.3u, IEEE 802.3x, IEEE 802.3ab, and IEEE 802.3z standard.
- 6 kV surge protection for PoE ports.
- Up to 300 m long-range transmission.
- PoE watchdog to auto detect and restart the cameras that do not respond.
- Port isolation to improve network security.
- Gigabit network access design.
- Wire-speed forwarding.
- Store-and-forward switching.
- Solid high-strength metal shell.


▪ Specification

Model		DS-3E0528HP-E
General	Shell	Metal material
	Net Weight	2.98 kg (6.57 lb)
	Dimensions (W × H × D)	440.0 mm × 220.8 mm × 44.0 mm (17.32" × 8.69" × 1.73")
	Operating Temperature	0 °C to 45 °C (32 °F to 113 °F)
	Storage Temperature	-40 °C to 85 °C (-40 °F to 185 °F)
	Operating Humidity	5% to 95% (no condensation)
	Relative Humidity	5% to 95% (no condensation)
	Power Supply	100~240 V AC, 50/60 Hz, Max. 6.5 A
	Max. Power Consumption	400 W
	Power Consumption in Idle	30 W
	Installation Mode	Desk-Mounted
	Surge Protection	6 kV
	Network Parameters	Ports
MAC Address Table		8 K
Switching Capacity		56 Gbps
Packet Forwarding Rate		41.664 Mpps
Internal Cache		4.1 Mbits
PoE Power Supply	PoE Standard	IEEE 802.3af, IEEE 802.3at, IEEE 802.3bt
	PoE Port	Hi-PoE: Ports 1 to 4 PoE: Ports 1 to 24
	PoE Power Pin	8-pin power: 1/2(-), 3/6(+), 4/5(+), 7/8(-)
	Max. Port Power	Ports 1 to 4: 90 W Ports 5 to 24: 30 W
	PoE Power Budget	370 W
Dialing Function	Long Range	Ports 21 to 24: up to 300 m. Long range performance may vary depend on camera model or cable condition.
	Port Isolation	Ports 1 to 24: port isolation mode to improve network security. Ports in an isolation group cannot communicate with each other, but they can communicate with ports outside the isolation group.
	PoE Watchdog	Ports 1 to 24: auto detect and restart the cameras that do not respond.
Approval	EMC	FCC (47 CFR Part 15, Subpart B), CE-EMC (EN 55032: 2015+A11: 2020, EN IEC 61000-3-2: 2019, EN 61000-3-3: 2013+A1: 2019, EN 50130-4: 2011+A1: 2014, EN 55035: 2017+A11: 2020), IC (ICES-003: Issue 7:2020), RCM (AS/NZS CISPR 32: 2015)
	Safety	UL (UL 60950-1), CB (AMD1:2009, AMD2:2013, IEC 62368-1: 2014 (Second Edition), CE-LVD (EN 62368-1: 2014+A11: 2017)
	Chemistry	CE-RoHS (2011/65/EU)

▪ Available Model

DS-3E0528HP-E

▪ Typical Application

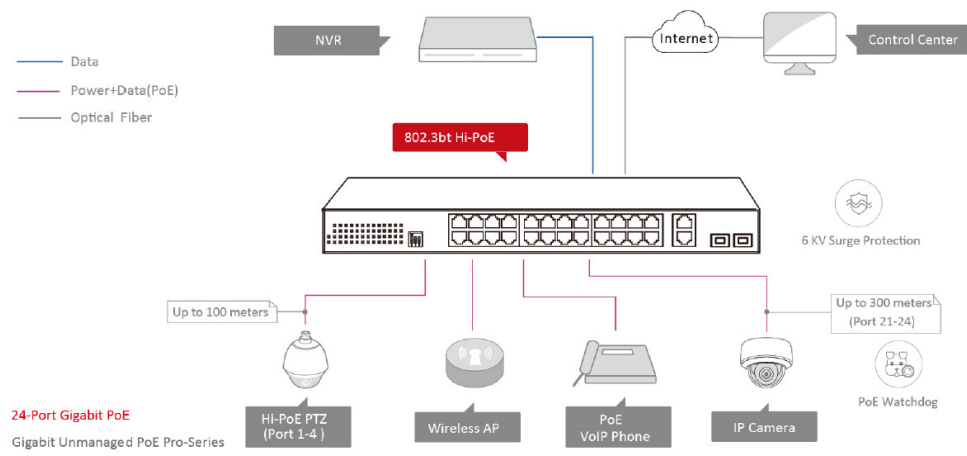

▪ Dimension (Unit: mm)

